



LED
Lighting System

The Fastest Solution Ever
Compact, Easy, No restrike time,
LED Balloon with tripod

■ **LED300W is Equal to 400w Metal Halide Lamp**

■ **Adjuster controls provide lighting for long time**

* Adjustable 3 step light Control 300W/200W/100W
Depending on the purpose and the locations

■ **No Restrike Time**

Provide instant turn on/off

B3Q3S

Compact Size
Easy to Carry Around



B3Q3H

ALL-IN-ONE Case
Compact and Able to pile up



Intensity300WLED

Equivalent to
400W Metal Halide Brightness

Glare Free Lighting with Balloon.
Friendly to People and 360 degree
illuminating solution.

Lighting + Sign

Not only balloon Light illuminates area, but
also become a sign as people recognize
it from so far away.



Rail Construction Use



Rescue Use

Energy Saving

(Adjuster Control)

LED cut
costs and save
energy

Metal Halide 400W	6.5hrs
LED Highest Power 300W	10hrs
LED Standard Power 200W	13hrs
LED Energy Saving 100W	14hrs

* With Yanmar generator G901S (Japanese Ver.)

Instant Turn On

No Restrike-Time,
Provide Fullest Brightness without
waiting.

Long Lifetime 40,000Hrs

Almost No Need to be Changed for lamp.


Halogen	2,000hrs
Metal Halide	12,000hrs
LED	40,000hrs

Gas Assisted Mast

For safety purpose, Mast goes down very
slowly when it's loosened.



Tripod

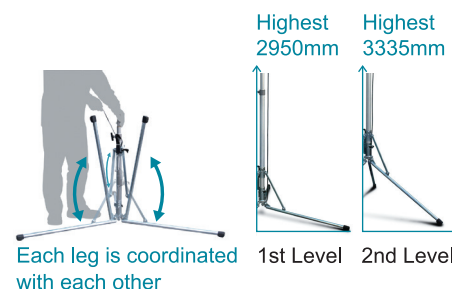

Canvas Carry case

B3Q3S




Hard Carry case

B3Q3H



Illumination Range : Lux

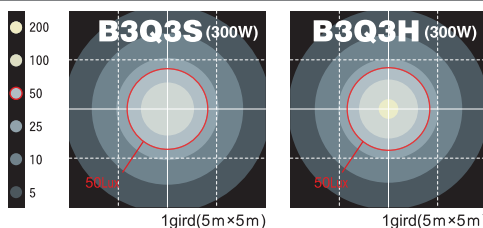


Option

Message Strip

Message Strips fit on both
sides of the balloon.



Dimensions

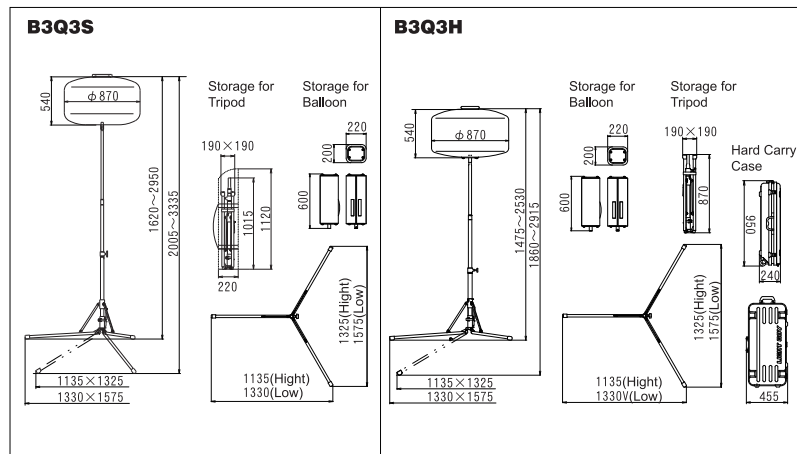

Specification

	B3Q3S-CE	B3Q3H-CE
Model	AC90~240	
Voltage(V)	50/60	
Frequency(Hz)	1.45(AC240V, 300W)	
Current(A)	36km/h	
Survival wind speed(low)	30km/h	
Survival wind speed(high)	113km/h	
Survival wind speed(with anchoring rope)	LED	
Type	3 Stages : 300W/200W/100W	
Dimming Control	40000(300W)/30000(200W)/16000(100W)	
Total Luminous Flux(lm)	-10~40	
Outside Temperature(°C)	Telescopic Aluminum Mast	
Mast	Hand Operation	
Mast Operating	1st Level(L×W×H)(mm) 1330×1575×1620~2950	
1st Level(L×W×H)(mm)	1330×1575×1475~2530	
2nd Level(L×W×H)(mm)	1135×1325×2005~3335	
2nd Level(L×W×H)(mm)	1135×1325×1860~2915	
Storage (L×W×H)(mm)	200×220×600	
Balloon	190×190×1015	
Tripod	190×190×870	
Carry Case	455×950×240	
Balloon(kg)	9.2	
Tripod(kg)	7.7	
Carry Case(kg)	0.7	
Total Weight(kg)	17.6	
Appropriate Generator	350W and above	